


# Traxall 500

## Magnetic Pipeline Pig Location & Tracking System

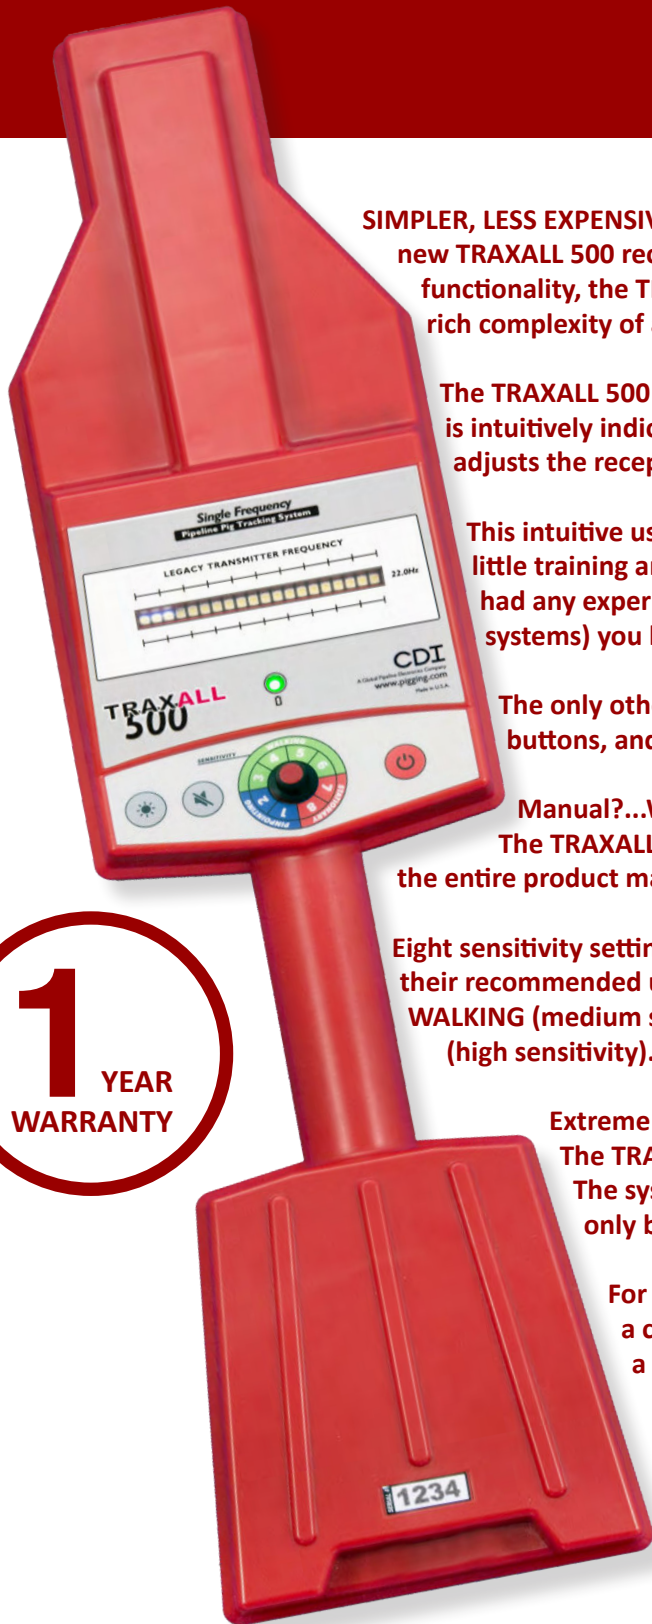

**SIMPLER, LESS EXPENSIVE, AND EASIER TO USE.** These were the design guidelines of our new TRAXALL 500 receiver. Similar to its “big brother” TRAXALL 720 in design and functionality, the TRAXALL 500 offers an alternative to those not needing the feature-rich complexity of a TRAXALL 720.

The TRAXALL 500 monitors the 22 Hz transmitter frequency. Signal strength is intuitively indicated on a horizontal row of scrolling LEDs, while a single knob adjusts the reception sensitivity of each frequency.

This intuitive user interface means that the TRAXALL 500 receiver requires very little training and support, lowering the total cost of system ownership. If you have had any experience at all tracking with a CDI system (or one of our competitor’s systems) you have nothing more to learn. It’s that easy.

The only other controls are LED brightness and audio mute buttons, and, of course, an ON/OFF switch. That’s it!

**Manual?...What Manual?**

The TRAXALL 500 receiver encapsulates virtually the entire product manual in the sensitivity knob label.

Eight sensitivity settings are neatly divided and labeled with their recommended use: PINPOINTING (low sensitivity), WALKING (medium sensitivity), and STATIONARY (high sensitivity).



**Extreme Weather? No Problem.**

The TRAXALL 500 was designed with extreme conditions in mind. The system is fully functional from +85° all the way down to -40°C limited only by the chemistry of the installed batteries.

For extreme cold environments, the TRAXALL 500 may be ordered in a cold-weather lithium battery configuration allowing full tracking to a blistering -40 degrees Celsius.

As with all CDI tracking devices, the TRAXALL 500 is compatible with all industry-standard 22 Hz transmitters.

Each TRAXALL 500 is shipped in a high-quality Pelican™ brand case for storage and shipment.



# TRAXALL 500

## PIG TRACKING BY CDI

- Unique one-piece design delivers the full reception range expected by our customers without external antennas or other cabling
- Works with all 22 Hz transmitters
- Sensitivity control for Pinpointing, Walking, or Stationary operation
- Operates 60+ hours on six AA-Cell batteries
- Optional Remote Flasher with 15 ft [4.5 m] for passage indication at a distance (TRAXALL 501)
- Optional Remote Water-tight Antenna with 20 ft [6 m] cable (TRAXALL 501)
- Built-in speaker alerts operator to pig passage events
- Custom chassis is water-resistant durable plastic, guaranteed to withstand the roughest pipeline conditions
- Fully operational temperature range 185°F to -40°F [+85°C to -40°C] limited by chemistry of installed AA-Cell batteries; cold weather lithium solution operates to -40°C on three cells



TRAXALL 501



OPTIONAL REMOTE ANTENNA (TRAXALL 501)



OPTIONAL REMOTE FLASHER (TRAXALL 501)

